

- INDEX
- PAINT
- HANDLEBARS
- STREET LEVER
- FORK SEALS
- CABLES
- SUSPENSION
- ELECTRICAL
- FILTERS
- BRAKE LINES
- BRAKES
- CABLE MAKING SUPPL
- CONTROLS
- DUAL SPORT
- MANUALS
- FSO PRODUCTS
- EMGO
- DRIVE
- DISPLAY
- JETS
- BEARINGS
- EYEWEAR
- VINTAGE
- MIRRORS
- EUROPEAN
- KICKERS
- SHIFTERS
- MISC
- HARD PARTS
- SHOP TOOLS
- CHEMICALS
- TOOLS



Kreem Professional Fuel Tank Liner

Kreem Fuel Tank Liner is designed for use as a preventive maintenance product in metal and fiberglass tanks, new or old; containing gasoline, gasohol, or diesel. Kreem Fuel Tank Liner has a unique formulation with extremely rapid set-up, that arrests corrosion, prevents leakage from hairline cracks and seam pinholes by coating the tank's inner surface with a fuel resistant elastomomer. Feel confident using gasohol in your tank coated with Kreem Fuel Tank Liner as methyl or ethyl alcohol have no effect on the coating.

Quality Required:

For small tanks (1-25 gallons), use approximately one pint of Kreem Fuel Tank Liner per three gallons of tank capacity. For spraying or brushing - thin Kreem Fuel Tank Liner with methyl ethyl ketone to desired consistency.

Surface Preparation:

Caution: Surface prep solutions may damage paint, if you're going to paint the tank coat the inside first. Remove petcocks to prevent fouling and plug openings. Remove all grease, oil, loose rust from tank's inner surface with Kreem Tank Prep. This is the most critical step, since proper adhesion depends upon an oil-free surface. Most tanks must also be prepped, since tank manufacturers coat the inside of their new tanks with protective film.

439-01016

Pint can.

For a case: order 12

439-01032

Quart can.

For a case: order 6



Prep & Seal Kit

1 pint of sealer & prep kit. The Kreem Combo-Pack gives your customer a shrink-wrapped kit for the complete treatment of average size tanks. just one unit to order, stock and sell...and at a special price. Kreem Combo-Pack can be split, of course, to produce an individual component of Fuel Tank Liner, Tank Prep A and Tank Prep B.

439-05040

Combo Pack

For a case: order 6



Tank Prep Kit

Because permanent adhesion of Kreem Tank Liner is possible only on a clean oil-free surface, Kreem Corp offers a special two-part tank preparation kit.

Tank-Prep A is a concentrated cleaner which dissolves rust, etches the metal surface, and removes oil and grease. The concentrate is diluted 20:1 with water (a pint container makes 20-1/2 gallons of cleaner) and used to treat the tank interior for a minimum of four hours. When treatment is complete, inspection will reveal that loose rust has been removed and that the tank surface has been etched to promote adhesion of the lining. Tank Prep B is a final rinse and conditioner. A brief rinse will remove any residual oil and moisture, and will prepare and condition the tank interior for the Kreem liner. note that Kreem treatment can begin immediately after the final conditioning.

439-05024

Tank Prep

For a case: order 6

Sealants & Adhesives

INDEX

PAINT

HANDLEBARS

STREET LEVERS

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPLIES

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS

Permatex Super Weatherstrip Adhesive

Often referred to as "Gorilla Snot". Bonds rubber, metal, glass, vinyl and painted metal surfaces in 3 to 4 minutes.

449-80638 2 oz. carded tube

For a case: order 12

449-80639 5 oz. boxed tube



ThreeBond 1521 Synthetic Rubber Adhesive

The 430-01521 is a contact cement which is a multi-purpose, rubber based adhesive that gives excellent bonding characteristics to a wide variety of materials including rubber, plastic, vinyl, metal, leather, woods, ceramics and more. Provides a strong, waterproof bond and sets up within 5-10 minutes depending on temperature and humidity.

430-01521 Net 5.3 oz. (150g)



ThreeBond 1211 Silicone Liquid Gasket

430-01211 Silicone Liquid Gasket is a tough durable sealer utilizing silicone rubber as a primary component. White in color, its solventless, semi-drying and visco-elastic properties make it ideal for numerous applications where a long lasting, faultless seal is absolutely critical. As it comes in contact with air, it forms a rubberized, elastic mass impervious to vibrations and impacts. Can be applied to flange surfaces and screw sections to prevent water, oil, gasoline and chemical leaks. 100% effective over a wide temperature range, 76dg.F to 482dg.F (-60dg.C to 250dg.C). Tack-free in 90 minutes; fully cured and bonded within 24 hours; attains optimum strength in three days.

Recommend for motorcycle, personal watercraft and ATV engines.

430-01211 Net 3.5 oz. (100g)



ThreeBond 1207D Silicone Liquid Gasket

430-01207 is a one-component RTV rubber, which has a quick curing property and shows superior pressure resistance just after application and assembly. Specially formulated for automotive engine gasketing applications, the TB1207D provides excellent oil, gas, water and chemical resistance. Perfect for sealing complex three-point surfaces of cylinder blocks, chain cases, oil pans and joint surfaces with large clearances. Silver in color, the 430-01207 has a temperature range -76dg.F to 482dg.F (-60dg.C to 250dg.C). Tack-free time 5 minutes; fully cured and bonded within 24 hours; attains optimum strength in three days. Recommended for automotive engines.

430-01207 Net 3 oz. (85g)



ThreeBond 1104 Liquid Gasket

Excellent padding properties make this semi-drying, visco-elastic sealer the perfect product for sealing joint surfaces with large clearances. Special synthetic rubber provides excellent cushion to absorb vibrations and impacts without failure, especially where coolants are involved. Apply to flange surfaces and screw sections to prevent leakage of water, oil, gasoline and chemicals. Examples of specific applications include sealing timing chain cases, 2-piece cylinders, side covers, transmission case covers, clutch housing bolts, and the oil filter mounting surfaces. Since TB1104's introduction, original equipment automotive and motorcycle manufacturers have successfully used this high-reliability liquid gasket in numerous innovative, cost-saving applications.

430-01104 Net 3.5 oz. (100g)



Permatex® the Right Stuff®

Gasket Maker

Makes any size or shape leak-proof gasket in just 1 minute. Temperature range: -75°F to 450°F; 550°F int.; resists auto and shop fluids. Protects against leaks caused by vibration and thermal expansion.



449-25224 – 7 oz. Auto Tube

Permatex® Ultra Copper®

High Temp Silicone RTV Gasket Sensor-safe, low odor, noncorrosive. Most advanced high temperature silicone gasket available. Superior adhesion. Temperature range: -75°F to 700°F int.; resists auto and shop fluids and vibration.



449-81878 – 3 oz. Tube

Permatex® MotoSeal™ 1

Ultimate Gasket Maker Grey
Resistant to gasoline. Superior adhesion. Resists high temperature and performs well at low temperatures. Effective on uneven joint surfaces.



449-29132 – 2.7 fl. oz. Tube

Permatex® Ultra Grey®

RTV Silicone Gasket Maker
Sensor-safe, low odor, noncorrosive. For high torque applications. Exceeds manufacturers' performance requirements. Guaranteed not to leak. Temperature range: -75°F to 625°F intermittent; resists auto and shop fluids and vibration.



449-82194 – 3.5 oz. Tube

Permatex® Anaerobic Gasket Maker 518

- Noncorrosive gasketing material designed for use on aluminum, iron and steel flanged mating surfaces.
- Ideal for on-the-spot and emergency repairs.
- Fills gaps up to .015" and cures to a solvent-resistant seal.
- Parts disassemble easily.



449-51817 – 6 ml Tube
449-51813 – 50 ml Tube

Permatex® Gasket Remover

- Fast-curing formula. Sensor-safe.
- Quickly removes even baked-on gaskets and all types of gasketing adhesives and sealants.
- Removes gaskets from any type of assembly in 10 to 12 minutes.
- Prepares metal parts for new gasket and assembly.
- Reduces scraping and sanding.
- Prevents damage to flanges.



449-80646 – 12 oz. net wt.

INDEX

PAINT

HANDLEBARS

STREET LEVERS

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPLIES

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS

INDEX

PAINT

HANDLEBARS

STREET LEVERS

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPLIES

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS



Permatex® Cold Weld

Bonding Compound

A 15 minute, two-part adhesive and filler system that eliminates the need for welding or brazing. Once cured, it can be drilled, sanded, painted or filed. Resists most automotive, shop and cleaning fluids. Withstands temperatures to 300°F intermittent. Over 3000 PSI shear strength on steel.

449-14600 - 2x - 1 oz. Tubes



Permatex® Weatherstrip Cement

A translucent cement and sealer which bonds in minutes. Dries to a tough, strong bond.

449-80328 - 2 oz. Tube



Permatex® Super Bonder® Adhesive

Instant adhesive for general-purpose bonding of metals, alloys, rubber, etc.

449-49411 - 3 Gram Dispenser



Permatex® GELMATIC®

Super Glue Gel

The GELMATIC® applicator provides a package that precisely applies the no-run gel.

449-21937 - 5 Gram Dispenser.



Permatex® Clear Silicone

Adhesive Sealant

General-purpose, clear RTV indoor/outdoor sealant. Protects and repairs electrical wiring. Waterproof and flexible. May be applied to horizontal or vertical surfaces.

Temperature range:
-80°F to 450°F; resists oil, water, weather, vibration, grease.

449-80855 - 11 oz.

Cartridge

449-80050 - 3 oz. Tube



Permatex® Spray Adhesive

Dries clear with superior bonding strength. For permanent or reposition-able applications. Unique formula resists wear, humidity. Applications include porous and non-porous materials.

449-82019 - 11 oz.



Permatex® Plastix® Advanced

Plastic Bonder

Plastix repairs any plastic, guaranteed. No mixing required. Prepare the surface with the activator, apply the bonding agent and bond the parts.

449-82565 - 2 Gram Tube

Permatex® Decal & Paint Stripper

Quickly strips and removes decals, stickers, stripes and paint. Eliminates costly and time-consuming sanding and scraping. Works in 10-15 minutes at temperatures from 40°F to 100°F.



449-80577 – 12 oz.

Permatex® Enviro-Safe®

Cleaner & Degreaser

Biodegradable. Safely removes grease, dirt and oil. No CFC's, kerosene or chlorinated solvents. Low toxicity.



449-82586 – 16 oz.

Permatex® Enviro-Safe®

Carb & Choke Cleaner Effectively removes gum, varnish and deposit build-up. The "shear action" spray system improves performance, and fuel burns more efficiently. Biodegradable, non-corrosive, non-caustic, low toxicity, no CFC's or chlorinated solvents.



449-82587 – 12.5 oz.

Permatex® Plastic Cleaner

Cleans most plastics, fiberglass, acrylics and glass without scratching. Removes grease, stains and dirt. Forms a water-repellent, anti-static shield which resists fogging. Also cleans and polishes formica, enameled surfaces, ceramics and stainless steel.




449-80183 – 16 oz.
Spout-top Can

Permatex® Enviro-Safe®

Brake & Parts Cleaner

Penetrates, dissolves and removes dirt and oil. It is fast drying and residue free. This product is biodegradable, has low toxicity, no CFC's, no chlorinated solvents and is noncorrosive/non-caustic.

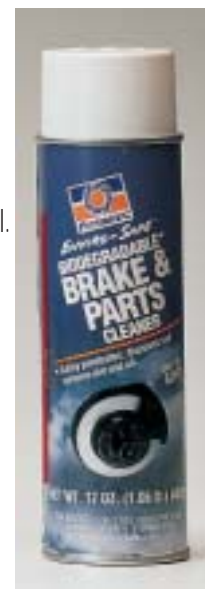

449-82585 – 17 oz.

INDEX

PAINT

HANDLEBARS

STREET LEVERS

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPLIES

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS

INDEX

PAINT

HANDLEBARS

STREET LEVERS

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPLIES

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS

Permatex® Force 109®

5 Way Spray General-purpose lubricant quickly penetrates, lubricates, dries, frees and protects part and assemblies. De-moisturizes electrical contacts and equipment. Seals out moisture and lubricates moving parts.



449-80068 – 9 oz.

Permatex® Silicone Spray Lubricant

Lubricates and water-proofs all types of mechanical equipment. Stops friction and squeaks; coats hinges and channels. Protects and renews rubber mountings, bushings and weatherstripping. Prevents binding, sticking and deterioration.



449-80070 - 10.25 oz.

Permatex® Chain Lube

Cleans, lubricates and protects all types of roller chains that operate under exposed conditions. Easy to apply; foaming action assures effective application.



449-80075 - 5 oz.

Permatex® White Lithium Grease

All-purpose white lubricant that protects against rust and makes surfaces friction-free. Non-toxic. Stainless. Withstands moisture and high heat.



449-81981 - 10.75 oz.

Permatex® Gas Tank & Radiator Repair

Seals small holes and weak seams in gas tanks without welding or tank removal. Repairs leaks and holes in all types of radiators. Permanent. Hardens in 60 minutes.



449-80884 – .25 oz. stick.

Permatex® Dielectric Tune-Up Grease

Protects electrical connections and wiring from salt, dirt and corrosion. Extends life of bulb sockets. Prevents voltage leakage around any electrical connection. Also prevents spark plugs from fusing to boots.



449-81150 – .33 oz.

Permatex® Glass Glaze®

A protective glass treatment which leaves a smooth, non-stick surface. Visibility is improved year-round. Repels rain, frost and bugs. Cleans, polishes, protects. Easy three step process: spray, wipe and buff. Allows intermittent use of wipers at advanced speeds.



449-82065 - 8 fl. oz. Pump Spray

Permatex® Body Shop®

Flexible Parts Body Repair Compound
OEM approved. Repairs scratches, gouges and punctures. Fixes unsightly damage to vulnerable areas like flexible trim and bumpers. Provides a flexible, durable adhesion. Resists extreme environmental conditions and cold crack. Sandable in 20 minutes. Compatible with most plastics and galvanized steel. Non-shrinking.



449-25461 - 1 fl. oz.

Permatex® Ignition & Wire Dryer

De-moisturizes wet electrical wiring connections and ignition wires. Helps start wet engines. Seal out corrosion-causing moisture to ensure proper electrical current flow. Reduces engine, starter and battery wear.



449-81082 – 6 oz.

Permatex® “Pro Style”

Vinyl & Leather Repair Kit

A complete professional kit which contains: electric heat tool, 7 OEM color compounds, clear vinyl adhesive and filler, grain pattern paper, metal spatula, plastic dashboard hardening powder.



449-81781 - (net .34 oz.) – 1 Kit

INDEX

PAINT

HANDLEBARS

STREET LEVERS

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPLIES

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS

INDEX

PAINT

HANDLEBARS

STREET LEVERS

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPLIES

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS

Loctite® Threadlockers



Job-Size Display

Single job-size packs of our most popular threadlocking products packaged in a convenient point-of-purchase display. Great for add-on sales to repair parts or service charges. Small product packages are easily carried in a tool belt or box.

449-20237 – (242®) (271™)

449-19960 – Refill (242®)

449-19961 – Refill (271™)

Loctite® Threadlockers



Job-Size Display

Single job-size packs of our most popular threadlocking products packaged in a convenient point-of-purchase display. Great for add-on sales to repair parts or service charges. Small product packages are easily carried in a tool belt or box.

449-20237 – (242®) (271™)

449-19960 – Refill (242®)

449-19961 – Refill (271™)

Loctite® Threadlockers



Job-Size Display

Single job-size packs of our most popular threadlocking products packaged in a convenient point-of-purchase display. Great for add-on sales to repair parts or service charges. Small product packages are easily carried in a tool belt or box.

449-20237 – (242®) (271™)

449-19960 – Refill (242®)

449-19961 – Refill (271™)

Loctite® Removable Strength Threadlocker



BLUE OEM specified as 242®.

Ideal for all nut and bolt applications 1/4" (6mm) or larger. Locks and seals while preventing part loosening due to vibration. Protects threads from corrosion. Removable with hand tools for easy disassembly.



449-24200 – 6 ml Tube

449-24240 – 36 ml Bottle

Loctite® High Strength Threadlocker



RED OEM specified as 271™. Especially well-suited for permanently locking studs and press fits. Replaces set screws and snap rings. Locks against vibration loosening. Requires extra effort or special tools for removal.

449-27100 – 6 ml Tube

449-27140 – 36 ml Bottle

Loctite® High Temp High Strength Threadlocker



RED OEM specified as 272. Prevents bolts and press fits 3/8" to 1" (10mm to 25mm) from loosening due to shock, severe vibration and heat stress. Suited for temperatures up to 450°F. Removable with heat and hand tools.

449-27200 – 10 ml Bottle



449-64000 – 6 ml Tube
449-64040 -36 ml Bottle

Loctite® Sleeve Retainer

OEM specified as 640. High strength, anaerobic adhesive secures slip fit assemblies. Adds up to 3000 PSI holding power. Restores fit to worn or out-of-tolerance assemblies. Requires special tools for removal.

Loctite® Wicking Threadlocker GREEN

OEM specified as 290. A low viscosity liquid that wicks along the threads of preassembled fasteners to secure them in place. For fasteners ranging from #2 to 1/2" (2.2mm to 12mm) in size. Removable with heat and hand tools.



449-29000 – 6 ml Tube
449-29040 – 36 ml Bottle



449-81668 – .44 oz.

Loctite® Form-A-Thread®

Stripped Thread Repair Kit

Makes reliable thread repairs without drills, taps, tools or inserts. Restores worn, stripped or damaged threads and eliminates future corrosion, galling, seizing and rust.

INDEX

PAINT

HANDLEBARS

STREET LEVER

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPL

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS

INDEX

PAINT

HANDLEBARS

STREET LEVERS

FORK SEALS

CABLES

SUSPENSION

ELECTRICAL

FILTERS

BRAKE LINES

BRAKES

CABLE MAKING SUPPLIES

CONTROLS

DUAL SPORT

MANUALS

FSO PRODUCTS

EMGO

DRIVE

DISPLAY

JETS

BEARINGS

EYEWEAR

VINTAGE

MIRRORS

EUROPEAN

KICKERS

SHIFTERS

MISC

HARD PARTS

SHOP TOOLS

CHEMICALS

TOOLS



Permatex® Fast Orange®

Hand Cleaners
Fine Pumice Lotion

The #1 selling, biodegradable, waterless, petroleum solvent-free hand cleaner contains no harsh chemicals, mineral oils or ammonia. Pure, fresh-smelling natural citrus power with aloe, lanolin, jojoba and Corn Huskers Lotion® for added skin conditioning and protection.

449-23507 – 3 oz. Tube
449-25116 – 15 fl. oz. Squeeze bottle
449-25218 – 1 gal. Bottle w/pump



Permatex® Fast Orange®

Hand Cleaners
Fine Pumice Lotion

The #1 selling, biodegradable, waterless, petroleum solvent-free hand cleaner contains no harsh chemicals, mineral oils or ammonia. Pure, fresh-smelling natural citrus power with aloe, lanolin, jojoba and Corn Huskers Lotion® for added skin conditioning and protection.

449-23507 – 3 oz. Tube
449-25116 – 15 fl. oz. Squeeze Bottle
449-25218 – 1 gal. Bottle w/pump



Permatex® Fast Orange®

Hand Cleaners
Fine Pumice Lotion

The #1 selling, biodegradable, waterless, petroleum solvent-free hand cleaner contains no harsh chemicals, mineral oils or ammonia. Pure, fresh-smelling natural citrus power with aloe, lanolin, jojoba and Corn Huskers Lotion® for added skin conditioning and protection.

449-23507 – 3 oz. Tube
449-25116 – 15 fl. oz. Squeeze Bottle
449-25218 – 1 gal. Bottle w/pump

